



Instructions Specifically Developed for Dealer Technicians

Description: **New Beetle Convertible CD Changer 2006>**

Part Number: **1C0 098 201 Installation Kit**

1J6 035 111 CD Changer

Quantity **1 each Component**

Supplier: **Panasonic**

Publish Date: **01 September 2005**



Attention:

Before starting, make sure painted and trim surfaces are protected to avoid scratching during installation process of the items. Use proper surface protection covers and work attire free of dirt and grease



Caution:



Read entire instructions thoroughly before starting. Installation should be performed only by a qualified person. Observe all safety precautions when working beneath a vehicle. Beware of sharp edges. Always wear safety glasses for eye protection.

© 2005 Volkswagen of America, Inc. All rights reserved. Information contained in this document is based of the latest information available at the time of printing and is subject to the copyright and other intellectual property rights of Volkswagen of America, Inc., its affiliated companies and its licensors. All rights are reserved to make changes as any time without notice. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopy, recording or otherwise, nor may these materials be modified or reposted to other internet sites, without expressed written permission of the publisher.



Part Number: 1C0 098 201 & 1J6 035 111
Description: Installation Kit & CD Changer
Supplier: Panasonic

Tools Required For Installation




Utility Knife
1/4 drive ratchet
1/4 driver
1/4 extension
10mm socket
#2 Phillips head screw driver
Metal ruler



Part Number: 1C0 098 201 & 1J6 035 111
Description: Installation Kit & CD Changer
Supplier: Panasonic

Installation Kit

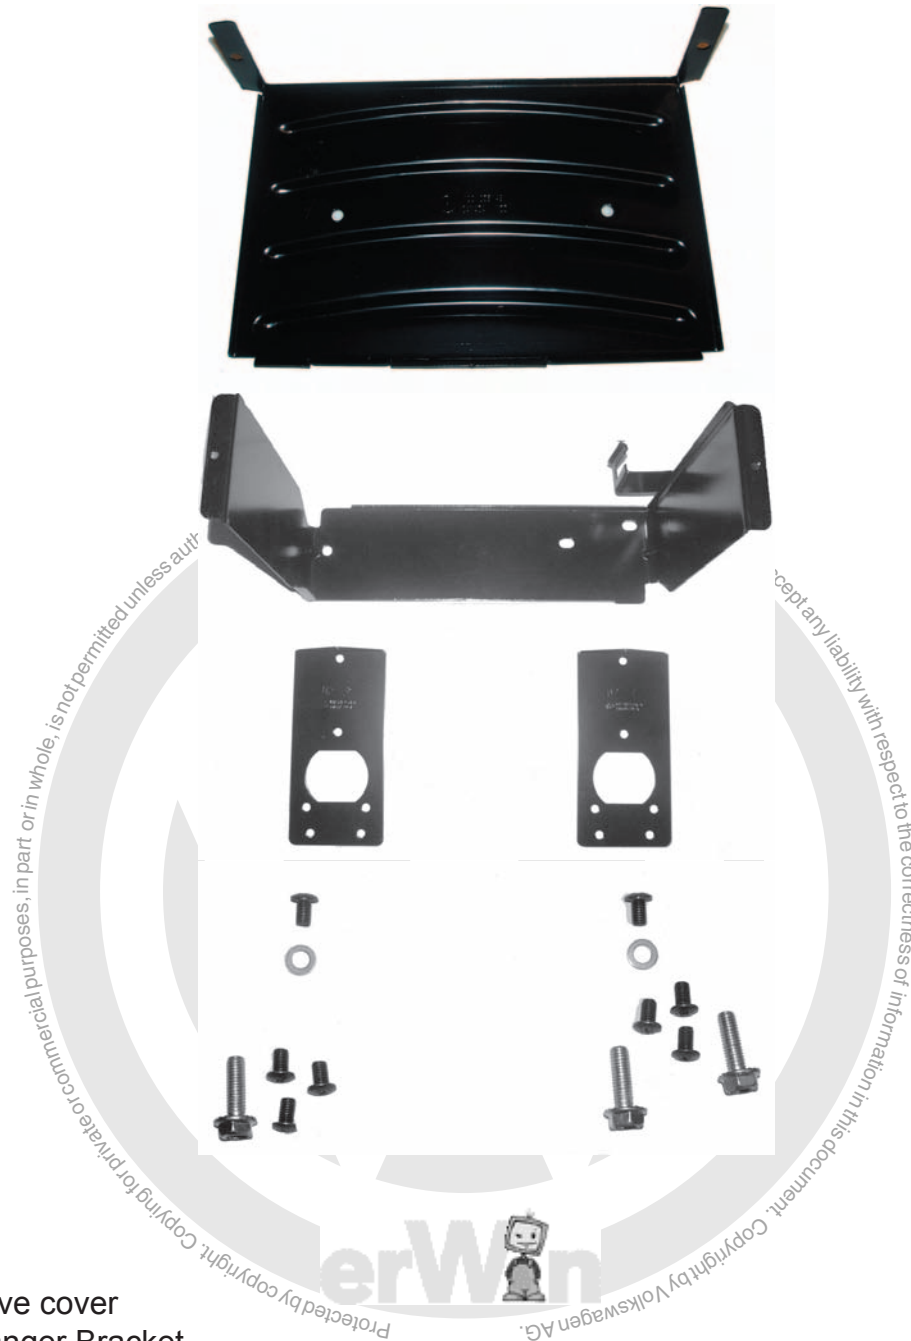

- 1ea - Protective cover
- 1ea - CD Changer Bracket
- 2ea - CD Changer Adapter Brackets
- 8ea - Phillips Head Screws
- 2ea - Flat Washers
- 3ea - 10mm Hex bolts



Part Number: 1C0 098 201 & 1J6 035 111

Description: Installation Kit & CD Changer

Supplier: Panasonic



Step#01


Open Trunk and remove factory accessories and place a drop cloth across the trunk sill to protect the painted surface.

Remove the trunk floor carpet and place on a surface where it will be trimmed later.



Step#02

Remove the trim from the trunk access panel and loosen the trunk liner trim at the lower left hand corner

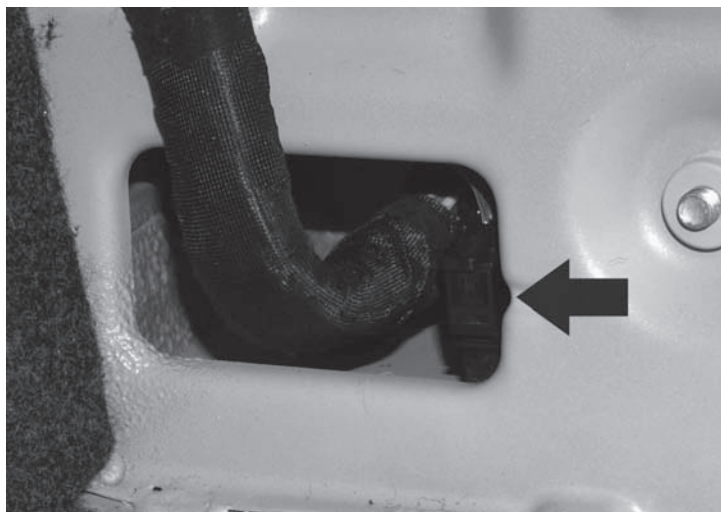

Step#03


Carefully lift the lower left hand edge of the trunk trim panel and remove the harness by sliding the blank female connector from its retaining clip.



Part Number: 1C0 098 201 & 1J6 035 111
Description: Installation Kit & CD Changer
Supplier: Panasonic



Step#04
Remove the blank female connector from the harness

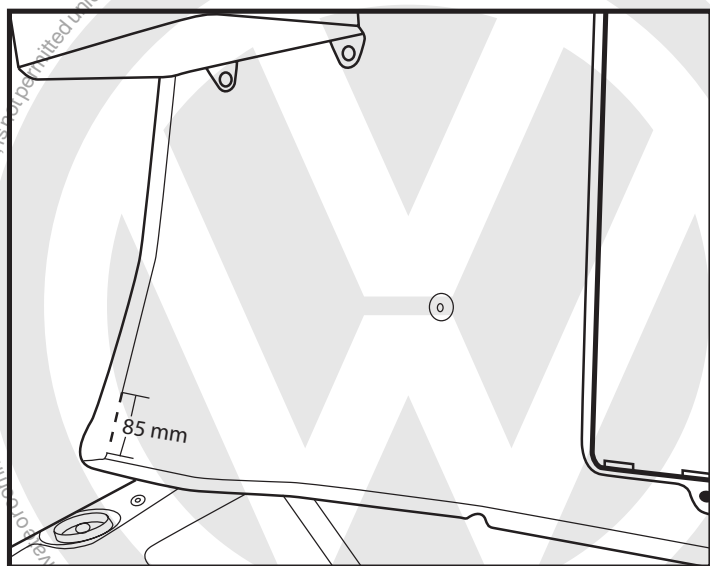


Step#05
Make an 85 mm cut in the slot of the trunk liner trim per the illustration.



Step#06
Route the harness and connector through cut made in the previous step.



Part Number: 1C0 098 201 & 1J6 035 111
Description: Installation Kit & CD Changer
Supplier: Panasonic

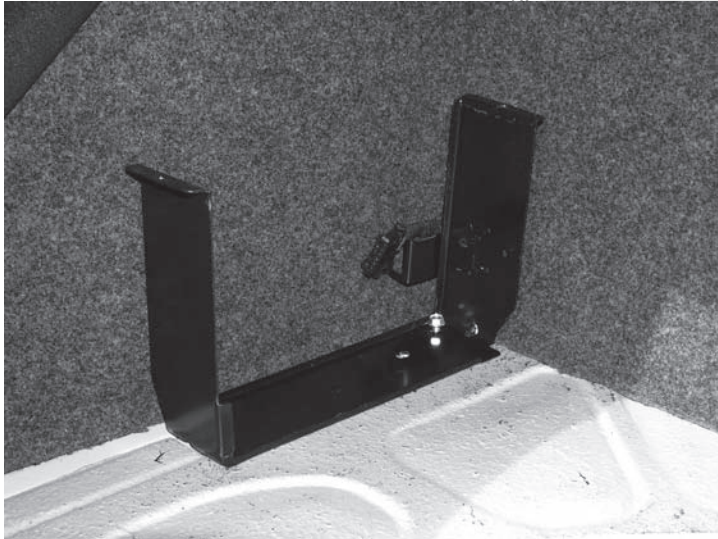

Step#07

Install the CD changer bracket.
Position the harness connector in
the bracket and install the bracket
with 2 bolts.



NOTE:

The bolts are to be installed
in the mounting holes that are
closest to the legs of the bracket.



Step#08

Set the indicator screw in the
Vertical position on both sides of
the CD changer



Step#09

Mount the 2 brackets to the
sides of the CD changer with the
Phillips head fasteners.



Part Number: 1C0 098 201 & 1J6 035 111

Description: Installation Kit & CD Changer


Supplier: Panasonic



Step#10

Connect the CD changer harness and position the connectors on the bracket.

Slide the CD changer into the bracket and route the harness on the outside of the leg. Install the CD changer protective cover in the bracket.

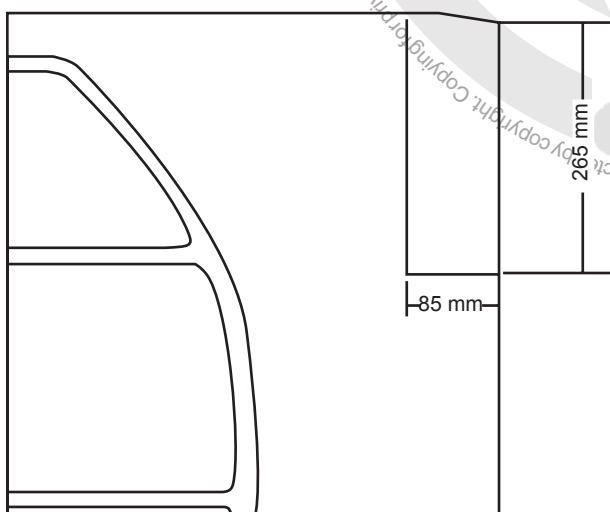

Back of Trunk Carpet

Step#11

Place the trunk floor carpet on a suitable surface to cut the carpet. Use a metal ruler and utility knife to cut the floor mat as shown in the drawing.



Step#12

Reinstall the trunk access panel trim and replace Trunk floor mat . Return factory accessories to the trunk.



Part Number: 1C0 098 201 & 1J6 035 111
Description: Installation Kit & CD Changer
Supplier: Panasonic




Step#13

For the vehicle systems to recognize the CD changer it will require reprogramming.

To reprogram connect the VAS 5051 On Board diagnostic scan tool to the vehicle DLC.

- Select "Vehicle self diagnosis"
- Select "56 – Radio"
- Select "07 – Code control unit"
- Change the last digit from 1 to 3
- Press "Q" button
- Exit "Diagnosis"

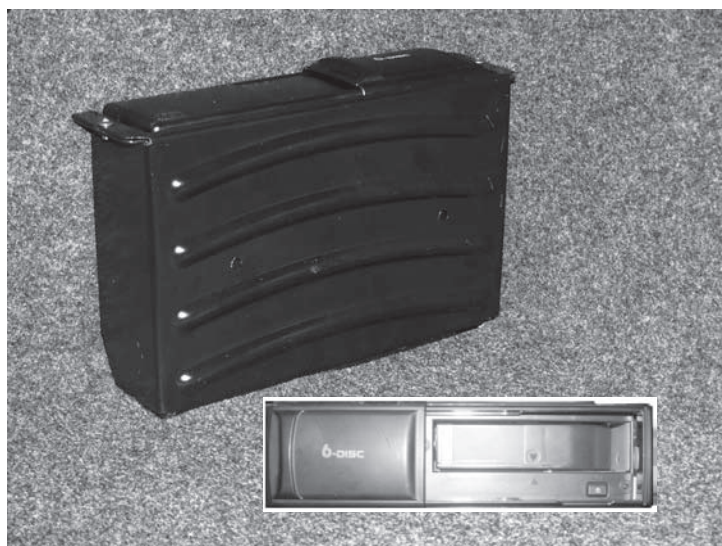

Step#14

Depress the CD cartridge eject button.

If cartridge ejects the system can be tested with a CD.

Load a CD in the cartridge and replace the cartridge. Select the CD to be played by the sound system. If the CD is selected and plays program the vehicle to recognize the CD changer.



NOTE:

If the cartridge does not eject, the CD changer may require replacement.

If the Sound system shows an ERROR message replace the CD Changer.

Refer to Radio/CD changer Owner's guide and check proper operation of CD changer.

To complete the installation remove the drop cloth and return any factory accessories that were in the trunk.



Cautions & Warnings

Please read these WARNINGS and CAUTIONS before proceeding with maintenance and repair work. You must answer that you have read and you understand these WARNINGS and CAUTIONS before you will be allowed to view this information.

- If you lack the skills, tools and equipment, or a suitable workshop for any procedure described in this manual, we suggest you leave such repairs to an authorized Volkswagen retailer or other qualified shop. We especially urge you to consult an authorized Volkswagen retailer before beginning repairs on any vehicle that may still be covered wholly or in part by any of the extensive warranties issued by Volkswagen.
- Disconnect the battery negative terminal (ground strap) whenever you work on the fuel system or the electrical system. Do not smoke or work near heaters or other fire hazards. Keep an approved fire extinguisher handy.
- Volkswagen is constantly improving its vehicles and sometimes these changes, both in parts and specifications, are made applicable to earlier models. Therefore, part numbers listed in this manual are for reference only. Always check with your authorized Volkswagen retailer parts department for the latest information.
- Any time the battery has been disconnected on an automatic transmission vehicle, it will be necessary to reestablish Transmission Control Module (TCM) basic settings using the VAG 1551 Scan Tool (ST).
- Never work under a lifted vehicle unless it is solidly supported on stands designed for the purpose. Do not support a vehicle on cinder blocks, hollow tiles or other props that may crumble under continuous load. Never work under a vehicle that is supported solely by a jack. Never work under the vehicle while the engine is running.
- For vehicles equipped with an anti-theft radio, be sure of the correct radio activation code before disconnecting the battery or removing the radio. If the wrong code is entered when the power is restored, the radio may lock up and become inoperable, even if the correct code is used in a later attempt.
- If you are going to work under a vehicle on the ground, make sure that the ground is level. Block the wheels to keep the vehicle from rolling. Disconnect the battery negative terminal (ground strap) to prevent others from starting the vehicle while you are under it.
- Do not attempt to work on your vehicle if you do not feel well. You increase the danger of injury to yourself and others if you are tired, upset or have taken medicine or any other substances that may impair you or keep you from being fully alert.
- Never run the engine unless the work area is well ventilated. Carbon monoxide (CO) kills.
- Always observe good workshop practices. Wear goggles when you operate machine tools or work with acid. Wear goggles, gloves and other protective clothing whenever the job requires working with harmful substances.
- Tie long hair behind your head. Do not wear a necktie, a scarf, loose clothing, or a necklace when you work near machine tools or running engines. If your hair, clothing, or jewelry were to get caught in the machinery, severe injury could result.
- Do not re-use any fasteners that are worn or deformed in normal use. Some fasteners are designed to be used only once and are unreliable and may fail if used a second time. This includes, but is not limited to, nuts, bolts, washers, circlips and cotter pins. Always follow the recommendations in this manual - replace these fasteners with new parts where indicated, and any other time it is deemed necessary by inspection.

Cautions & Warnings

- Illuminate the work area adequately but safely. Use a portable safety light for working inside or under the vehicle. Make sure the bulb is enclosed by a wire cage. The hot filament of an accidentally broken bulb can ignite spilled fuel or oil.
- Friction materials such as brake pads and clutch discs may contain asbestos fibers. Do not create dust by grinding, sanding, or by cleaning with compressed air. Avoid breathing asbestos fibers and asbestos dust. Breathing asbestos can cause serious diseases such as asbestosis or cancer, and may result in death.
- Finger rings should be removed so that they cannot cause electrical shorts, get caught in running machinery, or be crushed by heavy parts.
- Before starting a job, make certain that you have all the necessary tools and parts on hand. Read all the instructions thoroughly; do not attempt shortcuts. Use tools that are appropriate to the work and use only replacement parts meeting Volkswagen specifications. Makeshift tools, parts and procedures will not make good repairs.
- Catch draining fuel, oil or brake fluid in suitable containers. Do not use empty food or beverage containers that might mislead someone into drinking from them. Store flammable fluids away from fire hazards. Wipe up spills at once, but do not store the oily rags, which can ignite and burn spontaneously.
- Use pneumatic and electric tools only to loosen threaded parts and fasteners. Never use these tools to tighten fasteners, especially on light alloy parts. Always use a torque wrench to tighten fasteners to the tightening torque listed.
- Keep sparks, lighted matches, and open flame away from the top of the battery. If escaping hydrogen gas is ignited, it will ignite gas trapped in the cells and cause the battery to explode.
- Be mindful of the environment and ecology. Before you drain the crankcase, find out the proper way to dispose of the oil. Do not pour oil onto the ground, down a drain, or into a stream, pond, or lake. Consult local ordinances that govern the disposal of wastes.
- The air-conditioning (A/C) system is filled with a chemical refrigerant that is hazardous. The A/C system should be serviced only by trained automotive service technicians using approved refrigerant recovery/recycling equipment, trained in related safety precautions, and familiar with regulations governing the discharging and disposal of automotive chemical refrigerants.
- Before doing any electrical welding on vehicles equipped with anti-lock brakes (ABS), disconnect the battery negative terminal (ground strap) and the ABS control module connector.
- Do not expose any part of the A/C system to high temperatures such as open flame. Excessive heat will increase system pressure and may cause the system to burst.
- When boost-charging the battery, first remove the fuses for the Engine Control Module (ECM), the Transmission Control Module (TCM), the ABS control module, and the trip computer. In cases where one or more of these components is not separately fused, disconnect the control module connector(s).
- Some of the vehicles covered by this manual are equipped with a supplemental restraint system (SRS), that automatically deploys an airbag in the event of a frontal impact. The airbag is operated by an explosive device. Handled improperly or without adequate safeguards, it can be accidentally activated and cause serious personal injury. To guard against personal injury or airbag system failure, only trained Volkswagen Service technicians should test, disassemble or service the airbag system.

Cautions & Warnings

- Do not quick-charge the battery (for boost starting) for longer than one minute, and do not exceed 16.5 volts at the battery with the boosting cables attached. Wait at least one minute before boosting the battery a second time.
- Never use a test light to conduct electrical tests of the airbag system. The system must only be tested by trained Volkswagen Service technicians using the VAG 1551 Scan Tool (ST) or an approved equivalent. The airbag unit must never be electrically tested while it is not installed in the vehicle.
- Some aerosol tire inflators are highly flammable. Be extremely cautious when repairing a tire that may have been inflated using an aerosol tire inflator. Keep sparks, open flame or other sources of ignition away from the tire repair area. Inflate and deflate the tire at least four times before breaking the bead from the rim. Completely remove the tire from the rim before attempting any repair.
- When driving or riding in an airbag-equipped vehicle, never hold test equipment in your hands or lap while the vehicle is in motion. Objects between you and the airbag can increase the risk of injury in an accident.

I have read and I understand these Cautions and Warnings.

